


Installing a wall to wall cable

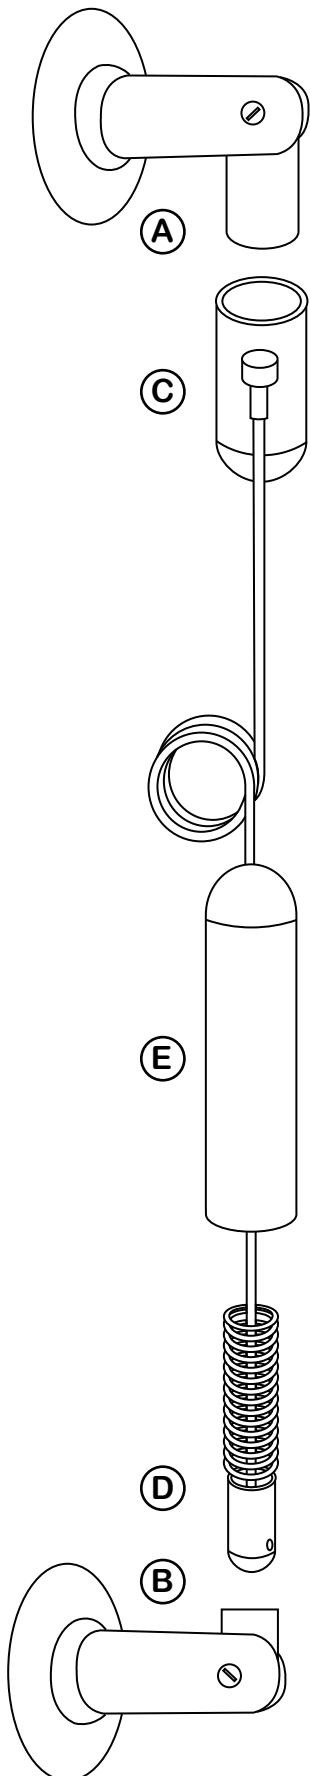

- Having marked out the bottom wall positions, use a plumb bob to find the location on the wall directly above the bottom wall position.
- Unscrew the fixing plate from the ceiling fixing (small end) and securely fix to your mark on the wall (top). (A)
- Do the same to the bottom wall with the fixing plate from the cable tensioner. (B)
- Screw one elbow to the top fixing and one to the bottom fixing.
- Hang the cable from the top wall fixing allowing it to unwind. (C)
- Undo the small brass fitting (D) attached to the cable inside the tensioner (E) with the 1.5mm allen key provided, slide this up the cable and with the cable pulled tight, retighten this fitting flush with the top edge of the bottom wall fixing. (B)
- Cut off the cable so that it sits 5mm below the top edge of the bottom wall fixing.
- Screw the outer body of the tensioner (E) onto the bottom wall fixing.
- You should feel the tension starting to be taken up just before the tensioner is screwed fully down.

Note. Check that the cable will pull gently out against the spring. If there is no movement the tension is too strong and the brass fitting needs to be moved down the cable.

Remember, the cable is only as strong as your top fixing.